

# 1371 MiniWRAS

## Portable wide-range aerosol spectrometer

For ultrafine particles and PM measurements

- Particle sizing and counting from 10 nm to 35  $\mu\text{m}$
- Two measuring instruments in a single device
- No liquids or consumables



## FEATURES

- **Two measuring instruments in a single device**  
Combination of optical (OPC) and electrical (nanosizer) particle detection
- **One combined data set**  
PM<sub>10</sub>, PM<sub>2.5</sub>, PM<sub>1</sub>, inhalable, thoracic, and respirable particle number size distribution
- **41 equidistant size channels**  
From 10 nm to 35 µm
- **Intelligent Li-ion battery**  
For portable use up to 10 hours
- **Flexible data acquisition and communication**  
With USB flash drive, Bluetooth and MiniWRAS software
- **Particle-free purge air**  
For improving detection and reducing signal noise

## TECHNICAL DATA

<b>Detection principle</b>	<ul style="list-style-type: none"> <li>• Diffusion charging (DC), electrical mobility-based sizing and detection in Faraday cup electrometer (FCE)</li> <li>• Optical particle counter and spectrometer (OPC) using light scattering at single particles with diode laser</li> </ul>
<b>Output</b>	<ul style="list-style-type: none"> <li>• PM<sub>10</sub>, PM<sub>2.5</sub>, PM<sub>1</sub></li> <li>• Dust mass fractions as per EN 481: inhalable, thoracic, respirable</li> <li>• Particle number concentration and size distribution</li> </ul>
<b>Particle size range</b>	10 nm ... 35.15 µm, 10 ... 193 nm (electrical), 0.253 ... 35.15 µm (optical)
<b>Size channels</b>	41 (10 electrical and 31 optical)
<b>Particle number concentration</b>	200 ... 1,000,000 particles/cm <sup>3</sup> ; depending on charging state (electrical) 0 ... 5,300,000 particles/l (optical)
<b>Dust mass concentration</b>	0 µg/m <sup>3</sup> ... 100 mg/m <sup>3</sup>
<b>Nanosizer measurement uncertainty</b>	± 40% for number concentration and geometric mean diameter (electrical)
<b>OPC counting efficiency</b>	98.2% for 0.3 µm, 99.5% for 0.5 µm, 91.8% for 1.0 µm, 91.0% for 5 µm, meets ISO 21501-1 (optical)
<b>Time resolution</b>	<ul style="list-style-type: none"> <li>• 60 s for 10 channels, 6 s per channel sequentially, storage interval 1 min (electrical)</li> <li>• 6 s for 31 channels, storage interval 1 min (optical)</li> </ul>


## OPTIONAL ACCESSORIES

- 1152 Isokinetic sampling probe for 4 to 25 m/s  
1158 TRH external sensor for temperature and relative humidity

## BENEFITS

- **Suitable for numerous applications**
  - Workplace monitoring for both ultrafine particles (UFP) and dust mass fractions
  - Nanoparticle source identification
  - Indoor air quality (IAQ)
  - R+D testing in industry
- **No consumables or liquids**  
Fully portable, operation irrespective of position
- **No handling license required**  
Non-radioactive unipolar diffusion charging (DC)
- **Compact design**  
Allows easy integration into laboratory or mobile setups
- **Easy to use**
  - Status control via LEDs
  - Start/stop button for stand-alone operation

<b>Volume flow rate</b>	1.2 l/min ± 3%
<b>Purge air (OPC)</b>	0.4 l/min, particle-free air; protects laser optics in OPC; reference air for self-test
<b>Purge air (FCE)</b>	0.3 l/min dried, particle-free air; minimizes noise level in FCE
<b>Power supply</b>	<ul style="list-style-type: none"> <li>• In: 100 ... 240 VAC, 47 ... 63 Hz,</li> <li>• Out: 18 VDC, 2.5 A</li> </ul>
<b>Battery</b>	<ul style="list-style-type: none"> <li>• Intelligent Li-ion-battery, 14.4 V, 98 Wh</li> <li>• 6.8 Ah for minimum 10 h operation</li> <li>• Recharging: 5 h with power supply</li> </ul>
<b>Connectivity</b>	Bluetooth, RS-232, USB flash drive, analog input for meteorological sensors
<b>Operating conditions</b>	+4 ... +40 °C (39 ... 104 °F), RH < 95%, non-condensing, 533 ... 1,133 mbar
<b>Transport and storage</b>	-20 ... +50 °C (-4 ... 122 °F) RH < 95%
<b>Dimensions (L x W x H)</b>	34 x 31 x 12 cm (13.4 x 12.2 x 4.7 in)
<b>Weight</b>	8.2 kg (18 lbs)

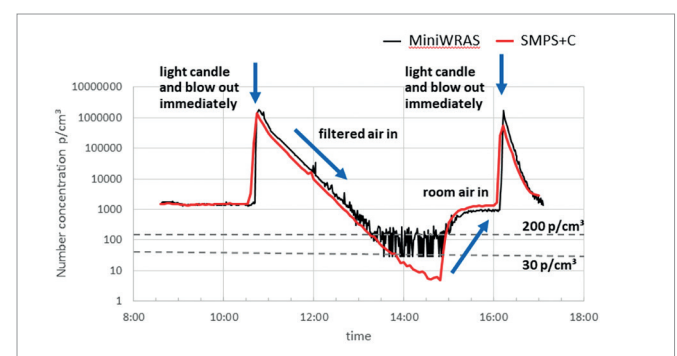

Time trace of MiniWRAS total particle number concentration vs. GRIMM SMPS+C system in candle light experiment.